

OMEGA COMPRESSORS

Heavy Duty Industrial Air Compressors



For us, it's not just business. It's personal.

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - VERTICAL TANK MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercooler.
 - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-5080V



TK-150120V

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TE-5060V	5	3450	15.4	175	60	TE-50	V-3	2	1300	3/4"	375	31	22	67
TE-5080V	5	3450	15.4	175	80	TE-50	V-3	2	1300	3/4"	466	34	25	65
TK-5060V	5	1725	19.0	175	60	TK-50	V-3	2	960	3/4"	490	34	22	72
TK-5080V	5	1725	19.0	175	80	TK-50	V-3	2	960	3/4"	586	34	25	70
TK-50120V	5	1725	19.0	175	120	TK-50	V-3	2	960	3/4"	749	42	30	76
TK-7580V	7.5	1725	27.5	175	80	TK-100	V-3	2	630	3/4"	760	39	25	73
TK-75120V	7.5	1725	27.5	175	120	TK-100	V-3	2	630	3/4"	834	42	30	79
TK-10080V	10	1725	35.3	175	80	TK-100	V-3	2	845	3/4"	829	39	25	73
TK-100120V	10	1725	35.3	175	120	TK-100	V-3	2	845	3/4"	992	42	30	79
TK-150120V	15	1725	52.0	175	120	TK-150	V-3	2	730	3/4"	1301	50	34	83
TK-200120V	20	1725	68.8	175	120	TK-150	V-3	2	920	3/4"	1572	50	34	83

OMEGA
COMPRESSORS

Specifications and data subject to change.
**Notes: CFM (FAD) = CFM Free Air Delivery

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - HORIZONTAL TANK MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200 psi and CRN approved for Canada.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercooler.
 - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-100120

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TE-5060	5	3450	15.4	175	60	TE-50	V-3	2	1300	3/4"	379	60	22	41
TE-5080	5	3450	15.4	175	80	TE-50	V-3	2	1300	3/4"	470	69	22	41
TK-5060	5	1725	19.0	175	60	TK-50	V-3	2	960	3/4"	494	60	22	45
TK-5080	5	1725	19.0	175	80	TK-50	V-3	2	960	3/4"	547	69	22	45
TK-50120	5	1725	19.0	175	120	TK-50	V-3	2	960	3/4"	660	75	27	49
TK-7580	7.5	1725	27.5	175	80	TK-100	V-3	2	630	3/4"	721	69	22	51
TK-75120	7.5	1725	27.5	175	120	TK-100	V-3	2	630	3/4"	923	75	27	53
TK-10080	10	1725	35.3	175	80	TK-100	V-3	2	845	3/4"	790	69	22	51
TK-100120	10	1725	35.3	175	120	TK-100	V-3	2	845	3/4"	903	75	27	53
TK-100240	10	1725	35.3	175	240	TK-100	V-3	2	845	1"	1218	93	33	59
TK-150120	15	1725	52.0	175	120	TK-150	V-3	2	730	3/4"	1212	75	27	57
TK-150240	15	1725	52.0	175	240	TK-150	V-3	2	730	1"	1527	93	33	63
TK-200120	20	1725	68.8	175	120	TK-150	V-3	2	920	3/4"	1257	75	27	57
TK-200240	20	1725	68.8	175	240	TK-150	V-3	2	920	1"	1572	93	33	63
TK-250240*	25	1770	100.0	175	240	TUK-300	V-4	2	720	1"	1882	93	33	63
TK-300240*	30	1770	115.0	175	240	TUK-300	V-4	2	850	1"	1934	93	33	63

Specifications and data subject to change.

*Notes: TK-250240 and TK-300240 already equipped with start-stop/continuous run option as standard.

**Notes: CFM (FAD) = CFM Free Air Delivery

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - BASE MOUNTED

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units equipped with liquid filled gauge, snubber and flex hose.
- All units may be ordered with magnetic starter (Starter supplied loose).
- All units supplied with necessary compressor oil for start up.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown with magnetic starter c/w 24 volt step down transformer.
 - Belt guard aftercooler.
 - Dual control - start/stop, continuous run.
- Specialty units and voltages available upon request.



TK-5000



AR-V240R***

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED*** Air Receiver
					MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT	
TE-5000	5	3450	15.4	175	TE-50	V-3	2	1300	1/2"	227	33	20	22	AR-V60R-PF
TK-5000	5	1725	19.0	175	TK-50	V-3	2	960	3/4"	342	35	20	26.5	AR-V80R-PF
TK-7500	7.5	1725	27.5	175	TK-100	V-3	2	630	1"	516	49	26	30	AR-V80R-PF
TK-100000	10	1725	35.3	175	TK-100	V-3	2	845	1"	585	49	26	30	AR-V120R-PF
TK-150000	15	1725	52.0	175	TK-150	V-3	2	730	1-1/2"	919	54	30	34	AR-V120R-PF
TK-200000	20	1725	68.8	175	TK-150	V-3	2	920	1-1/2"	964	54	30	34	AR-V120R-PF
TK-250000*	25	1770	100.0	175	TUK-300	V-4	2	720	2"	1274	64	36	38	AR-V240R-PF
TK-300000*	30	1770	115.0	175	TUK-300	V-4	2	850	2"	1326	64	36	38	AR-V240R-PF

Specifications and data subject to change.

*Notes: TK-250000 and TK-300000 already equipped with start-stop/continuous run option as standard.

**Notes: CFM (FAD) = CFM Free Air Delivery.

***Not included. Must be purchased separately.

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors

HEAVY DUTY SERIES - DUPLEX

- Quiet operation.
- Heavy duty two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All units factory set at 120 - 150psi.
- All units mounted on air receivers rated at 200psi and CRN approved for Canada.
- All units set up for lead lag operation unless otherwise specified.
- All units may be ordered with alternator control panel (Alternator control panel supplied loose).
- All units supplied with necessary compressor oil for start up.
- All units supplied with extended drain valve for air receiver for ease of draining condensation.
- Specify voltage upon ordering.
(5-10HP 230V/1PH) (5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Low oil shutdown for each pump.
 - Auto drain - electronic or pneumatic.
 - Belt guard aftercoolers.
- Specialty units and voltages available upon request.



TK-DX-50120

Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TK-DX-5080	5 X 2	1725	19.0 X 2	175	80	TK-50	V-3	2	960	3/4"	864	75	22	46
TK-DX-50120	5 X 2	1725	19.0 X 2	175	120	TK-50	V-3	2	960	3/4"	977	82	26.5	50
TK-DX-75120	7.5 X 2	1725	27.5 X 2	175	120	TK-100	V-3	2	630	3/4"	1325	82	26.5	53.5
TK-DX-75240	7.5 X 2	1725	27.5 X 2	175	240	TK-100	V-3	2	630	1"	1640	102	30	60
TK-DX-100120	10 X 2	1725	35.3 X 2	175	120	TK-100	V-3	2	845	3/4"	1463	82	26.5	53.5
TK-DX-100240	10 X 2	1725	35.3 X 2	175	240	TK-100	V-3	2	845	1"	1778	102	30	60
TK-DX-150240	15 X 2	1725	52.0 X 2	175	240	TK-150	V-3	2	730	1"	2396	102	30	64
TK-DX-200240	20 X 2	1725	68.8 X 2	175	240	TK-150	V-3	2	920	1"	2486	102	30	64

Specifications and data subject to change.

**Notes: CFM (FAD) = CFM Free Air Delivery.

OMEGA
COMPRESSORS

Heavy Duty Industrial Air Compressors

HEAVY DUTY - GAS SERIES

- Heavy duty single and two stage high efficient air compressors.
- Durable cast iron pumps for performance and durability.
- All pumps supplied with oil sight gauge.
- Splash type lubrication.
- All cast iron pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All pumps equipped with head unloaders.
- All units are equipped with Honda gas engines with low oil alert.
- 11HP, 13HP and 20HP Honda Engines equipped with electric start as standard.
- TUK-2030GEC and TUK-2000GEC units equipped with a centrifugal clutch as standard.
- All single stage units are factory set at 90-125psi. All two stage units are factory set at 140-175psi.
- All tank mounted units are on air receivers rated at 200 psi and CRN approved for Canada.
- All units supplied with necessary compressor oil for start up.
- All tank mounted units supplied with extended drain valve for air receiver for ease of draining condensation.
- All base mounted units equipped with liquid filled gauge, snubber and flex hose.
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For commercial, automotive and industrial applications.
- Factory mounted options available:
 - Centrifugal clutch option available for 11HP and 13HP.



TUK-1130GE



TUK-1330GE

Specifications - Tank Mounted Units

MODEL	HP	CFM (FAD)** 125 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
					MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
PUK-5530G	5.5	10.5	125	30	PUK-60	V-2	1	1100	1/2"	270	46	20	35
PUK-9030G	9	17.6	125	30	PUK-65	V-3	1	1100	1/2"	305	46	20	39

MODEL	HP	CFM (FAD)** 175 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
					MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TUK-1130GE	11	19.0	175	30	TUK-50	V-3	2	960	1/2"	440	46	20	39
TUK-1330GE	13	27.5	175	30	TUK-100	V-3	2	630	1/2"	570	46	20	44.5
TUK-2030GEC*	20	35.3	175	30	TUK-100	V-3	2	845	1/2"	600	48	24	44.5

Specifications - Base Mounted Units

MODEL	HP	CFM (FAD)** 125 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
					MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
PUK-5500G	5.5	10.5	125	N/A	PUK-60	V-2	1	1100	1/2"	170	30	17.25	30
PUK-9000G	9	17.6	125	N/A	PUK65	V-3	1	1100	1/2"	205	35	19	26.5

MODEL	HP	CFM (FAD)** 175 PSI	MAX PSI	TANK SIZE	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)		
					MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT
TUK-1100GE	11	19.0	175	N/A	TUK-50	V-3	2	960	1/2"	390	35	19	26.5
TUK-1300GE	13	27.5	175	N/A	TUK-100	V-3	2	630	3/4"	470	49	26	30
TUK-2000GEC*	20	35.3	175	N/A	TUK-100	V-3	2	845	3/4"	500	51	30	44.5

Specifications and data subject to change.

*Notes: TUK-2030GEC and TUK-2000GEC already equipped with centrifugal clutch.

**Notes: CFM (FAD) = CFM Free Air Delivery

OMEGA

COMPRESSORS

Heavy Duty Industrial Air Compressors



NCSE-75-50 CLOSED



NCSE-75-50 OPEN



AR-V240R*

HEAVY DUTY - SILENT SERIES

- Compressor enclosed soundproof cabinet for quiet operation.
- Constant air movement by cooling fan(s) over pump and to dissipate heat from cabinet.
- Each outfit is CSA approved.
- Each outfit equipped with control panel mounted and wired.
- Each outfit equipped with hour meter and low oil shutdown. (Low oil shutdown not available on NCSE-20 and NCSE-30 series)
- Heavy duty single stage cast iron high efficient compressor pumps on all models from NCSE-20 to NCSE-50 series.
- Heavy duty two stage cast iron high efficient compressor pumps on all models from NCSE-60 to NCSE-150 series.
- Durable cast iron pumps for performance and durability.
- Splash type lubrication.
- All pumps have stainless steel valves for longer life.
- Flywheels designed for excellent pump cooling.
- All models from NCSE-20 to NCSE-50 factory set at 70 - 90psi.
- All models from NCSE-60 to NCSE-150 factory set at 120 - 150psi.
- All units supplied with necessary compressor oil for start up.
- Specify voltage upon ordering.
(1/2-3HP 115V/1PH) (1/2-10HP 230V/1PH)
(5-30HP 208-230-460-575V/3PH)
- Factory tested prior to shipment.
- 2 year limited manufacturer's warranty.
- For all automotive, industrial applications including climate control, laboratories and dental clinics.


Specifications

MODEL	HP	MOTOR RPM	CFM (FAD)** 90 PSI	MAX PSI	NOISE LEVEL (dba)	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED* AIR RECEIVER
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT	
NCSE-20-05	1/2	1725	2.4	125	62	PK-50	V-2	1	509	1/2"	250	24	24	40	AR-V30R-PF
NCSE-20-075	3/4	1725	3.4	125	65	PK-50	V-2	1	694	1/2"	255	24	24	40	AR-V30R-PF
NCSE-30-01	1	1725	4.1	125	62	PK-60	V-2	1	525	1/2"	270	24	24	40	AR-V30R-PF
NCSE-50-015	1.5	1770	6.7	125	62	CK-40	V-3	1	420	1/2"	350	24	24	40	AR-V60R-PF
NCSE-50-02	2	1770	9.2	125	65	CK-40	V-3	1	544	1/2"	350	24	24	40	AR-V60R-PF

MODEL	HP	MOTOR RPM	CFM (FAD)** 150 PSI	MAX PSI	NOISE LEVEL (dba)	PUMP				AIR OUTLET	WEIGHT LBS.	DIMENSIONS (INCHES)			RECOMMENDED* AIR RECEIVER
						MODEL	CYLINDER	STAGE	RPM			LENGTH	WIDTH	HEIGHT	
NCSE-60-03	3	1725	13.0	175	65	CT-50	V-2	2	686	3/4"	480	30	29	43	AR-V60R-PF
NCSE-75-50	5	1725	19.0	175	68	TK-50	V-3	2	960	3/4"	550	30	29	43	AR-V80R-PF
NCSE-100-75	7.5	1725	27.5	175	68	TK-100	V-3	2	630	1"	800	36	31	51	AR-V80R-PF
NCSE-100-10	10	1770	35.3	175	70	TK-100	V-3	2	845	1"	835	36	31	51	AR-V120R-PF
NCSE-150-15	15	1770	52.0	175	70	TK-150	V-3	2	730	1-1/4"	1100	45	35	61	AR-V120R-PF

Specifications and data subject to change.
 *Not included. Must be purchased separately.
 **Notes: CFM (FAD) = CFM Free Air Delivery

OMEGA
COMPRESSORS

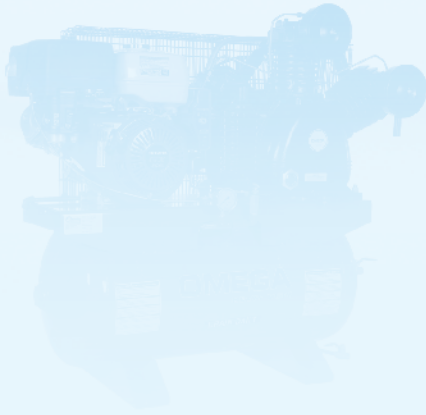

Compressed Air Accessories

Aluminum Air Piping

Ball Valves

Check Valves

Compressed Air Filters

Compressor Oil

Compressor Pumps

Desiccant Air Dryers

Electric Motors

Electronic Auto Drains

Filter Elements

Filter - Regulators - Lubricators

Flex Hose Connectors

Gauges

Magnetic Starters

Oil Monitors

Oil/Water Separators

Pilot Valves

Pneumatic Auto Drains

Pressure Switches

Refrigerated Air Dryers

Remote Air Receivers

Safety Valves

Service Parts

Throttle Controls

Vibration Isolators

Water Separators

2 year limited warranty

OMEGA

COMPRESSORS

Distributed by:

63 Morrow Rd.
Barrie, ON Canada L4N 3V7
Tel: 800-668-8448 or (705) 721-9500
Fax: (705) 721-8646
Email: info@omegacompressors.com
www.omegacompressors.com